






MONARFLEX[®] Super Light

- for normal working and weather conditions



Five good reasons to choose MONARFLEX[®] Super Light:

-  Unique eyelet fixing system
-  Suitable for normal working and weather conditions
-  Protects workers and equipment
-  Local stocks throughout Europe
-  A broad fixing accessory range

Setting the standard


*MONARFLEX[®] is setting the
standard in scaffold sheeting*

Technical data

Available sizes	Colour	Gross weight	Roll weight	Tensile Strength	Eyelet Pull-out Strength	Tear Strength
MONARFLEX® Super Light						
2,25 x 36M	transparent	190 g/m ²	15,4 kg	>10 kN/m	611 N	225 N
2,75 x 30M			15,7 kg			
3,25 x 36M			22,2 kg			
4,00 x 36M			27,4 kg			
MONARFLEX® Super Light Flamesafe						
2,25 x 36M	white	200 g/m ²	16,2 kg	>10 kN/m	>500 N	240 N
3,25 x 36M			23,4 kg			
4,00 x 36M			28,8 kg			

Features

MONARFLEX® Super Light is a product from the broad MONARFLEX® product range. The composition of the product is a strong 12x12 mm reinforcement grid in 1670 dtex Polyester yarn protected by 2 layers of Low Density Polyethylene (LDPE) with UV stabilization. By using the latest technology, we can design a product that is thinner, lighter and yet stronger than competitive products. The unique black eyelet system is part of a safe fixation system with better properties than corresponding banded products. The eyelet system is placed in patterns to fit most standard scaffold systems.

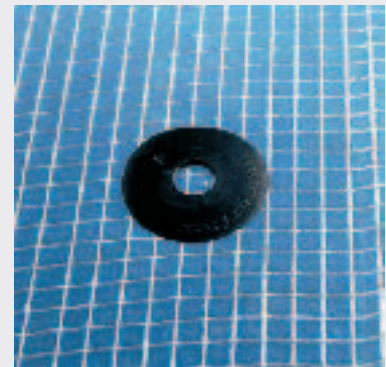

Durability

We recommend you to use MONARFLEX® Super Light for medium term projects up to 12 months in normal weather and working conditions. The sheeting will protect workers, environment and equipment on the scaffold and prevent any time loss due to the weather. The product is suitable for most projects in cities where the wind forces are not too high. The lightness of the product makes application effortless.

Application

MONARFLEX® Light can be applied both vertically and horizontally. The eyelets form a system that suit most standard scaffold systems. Fixing the sheeting to the scaffold must be done according to calculations taking factors like wind, building season and height of the surrounding buildings into consideration. We recommend the use of 1 fixing/m² but any fixing must be placed according to calculations for each project.

MONARFLEX® Product range

Monarflex is one of the worlds leading producers of reinforced scaffold sheeting. The MONARFLEX® product range includes products for all types of projects in all type of weather. Please contact us for further details.